

PLATINUM SMART-HEAT™ ELECTRIC

Available in black and white, our Platinum Smart-Heat™ Electric heater is specifically suited for low-clearance and design-focused spaces. This slim-line, stainless-steel unit spreads comfort evenly in its space, all while minimizing light emission and blending seamlessly into the background with our recess mounting solutions.



2300W, 3400W & 4500W SERIES
BLACK | WHITE



2300W, 3400W & 4500W SERIES
BLACK | WHITE

SPECIFICATIONS

Reference the specification guide below to help you select the correct solution for your needs.

| MODEL NUMBER | 2300W SERIES | 3400W SERIES | 4500W SERIES |
|----------------------------------------|------------------------------------------------|------------------------------------------------|------------------------------------------------|
| PRODUCT CODES PLATINUM ELECTRIC | BH0320003 BH0320007 BH0320019 BH0320020 | BH0320005 BH0320008 BH0320021 BH0320022 | BH3622000 BH3622004 BH3622001 BH3622005 |
| PRODUCT CODES PLATINUM ELECTRIC MARINE | BH0320015 BH0320017 BH0320023 BH0320024 | BH0320016 BH0320018 BH0320025 BH0320026 | BH3622002 BH3622006 BH3622003 BH3622007 |
| FUEL TYPE | ELECTRIC | ELECTRIC | ELECTRIC |
| COLOR | BLACK WHITE | BLACK WHITE | BLACK WHITE |
| HEAT AREA | 65FT ² | 108FT ² | 143FT ² |
| RATED CURRENT** | 220 - 240V/9.6A 208V/11.1A | 220 - 240V/14.2A 208V/16.3A | 220 - 240V/18.8A 208V/21.6A |
| MINIMUM FLOOR CLEARANCE | WALL 72" CEILING 96" | WALL 72" CEILING 96" | WALL 72" CEILING 96" |
| MOUNTING OPTIONS | | | |
| CEILING MOUNT | INCLUDED | INCLUDED | INCLUDED |
| WALL MOUNT | INCLUDED | INCLUDED | INCLUDED |
| RECESS KIT FLUSH MOUNT | ✓ | ✓ | ✓ |
| CEILING RECESS KIT PRODUCT CODES | BH3130017 | BH3130027 | BH3623000 |
| NEW RECESS KIT LOW CLEARANCE | ✓ | ✓ | - |
| LOW CLEARANCE RECESS KIT PRODUCT CODES | BH3623009 | BH3623008 | - |
| CEILING POLE EXTENSION | ✓ | ✓ | ✓ |
| CEILING POLE (2') PRODUCT CODE | BH3130023-1 | BH3130023-1 | BH3623020 |
| CEILING POLE (4') PRODUCT CODE | BH3130024-1 | BH3130024-1 | BH3623021 |
| FREESTANDING | - | - | - |
| CONTROL OPTIONS | | | |
| ON OFF | ✓ | ✓ | ✓ |
| ON OFF PRODUCT CODE | BH3130010-1 | BH3130010-1 | BH3130010-1 |
| DIMMER | ✓ | ✓ | ✓ |
| DIMMER PRODUCT CODE | BH3130011-1 | BH3130011-1 | BH3130011-1 |
| MASTER REMOTE * | ✓ | ✓ | ✓ |
| MASTER REMOTE PRODUCT CODE | BH3130012-1 | BH3130012-1 | BH3130012-1 |

* Control up to six zones of heaters with unlimited heaters per zone from a single remote control. Dimmer control required. Works with dimming controllers. Remote control operates within 100ft of heaters.

** Available in 208V and 220-240V configurations.

Measurements displayed within this document are for reference only, for complete requirements see the installation/user manual. Bromic takes no responsibility for incorrect or non-compliant installations. All measurement in this document are displayed in inches.

DIMENSIONS

With a wide range of sizes available, find the ideal heater to suit your outdoor space.

CONTROL OPTIONS



ON | OFF CONTROL




DIMMER CONTROL




MASTER REMOTE

PROFILE


2300W

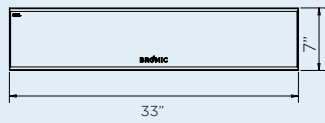

3400W

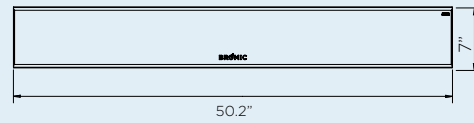


4500W

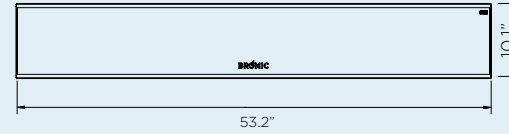


CEILING RECESS


CEILING RECESS FRAME 2300W

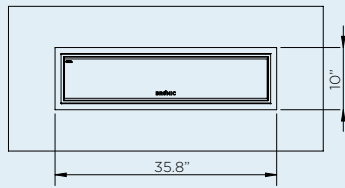


CEILING RECESS FRAME 3400W

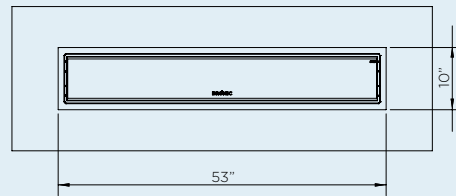


CEILING RECESS FRAME 4500W

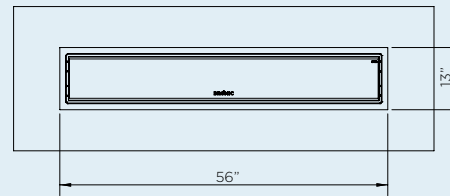


LOW CLEARANCE RECESS KIT
2300/3400W

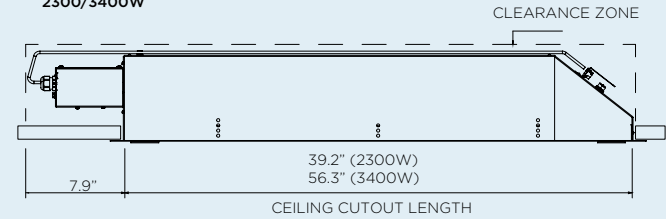






MINIMUM CAVITY OPTION 1
2300/3400W

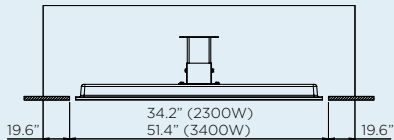

MINIMUM CAVITY OPTION 2
2300/3400W

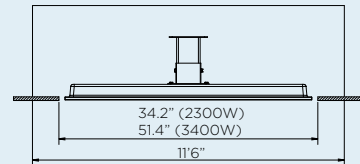

MINIMUM CAVITY FOR 4500W

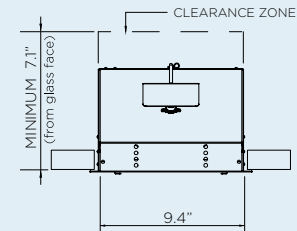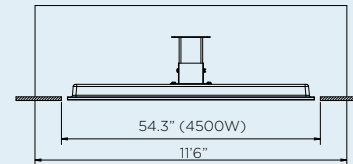


MOUNT OPTIONS


With a wide array of mounting options, Bromic offers solutions to compliment any decor and provide functionality for ambiance and comfort.

CEILING & WALL MOUNT


CEILING MOUNT CLEARANCE

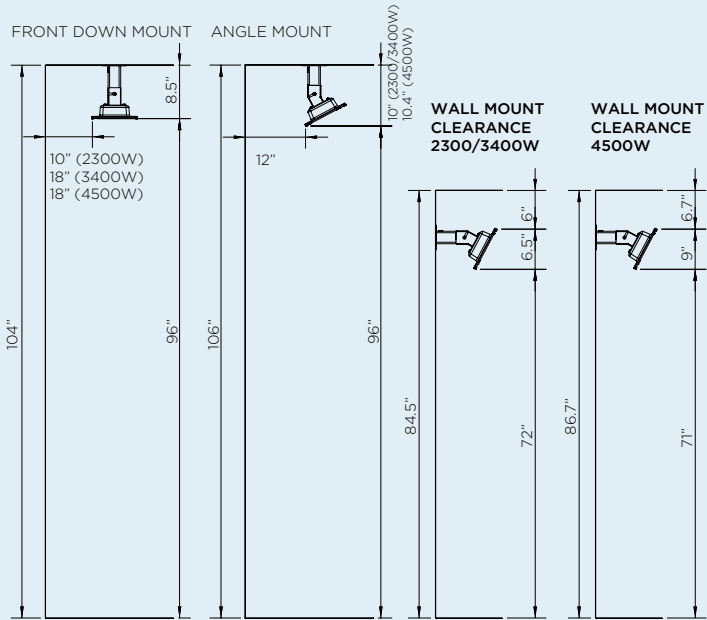


CEILING POLE CLEARANCE

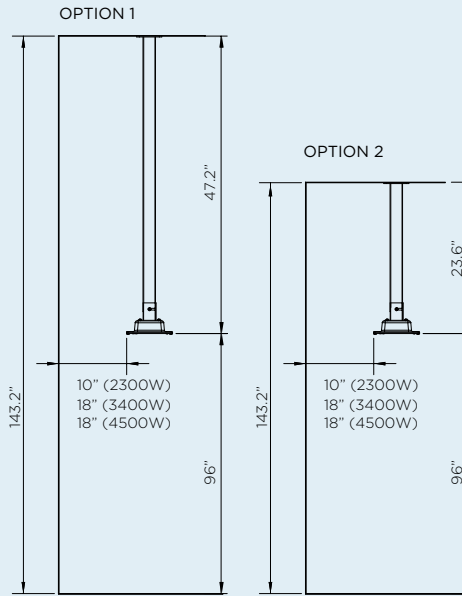

WALL BRACKET (INCLUDED)



CEILING BRACKET (INCLUDED)



HEATING REACH


Creating ideal comfort levels, Bromic heaters offer a variety of heat distribution options to suit your outdoor heating needs.


HEAT AREA

2300W SERIES
 HEATING APPROXIMATELY 65FT²
 2300W HEATING POWER

3400W SERIES
 HEATING APPROXIMATELY 108FT²
 3400W HEATING POWER

4500W SERIES
 HEATING APPROXIMATELY 143FT²
 4500W HEATING POWER

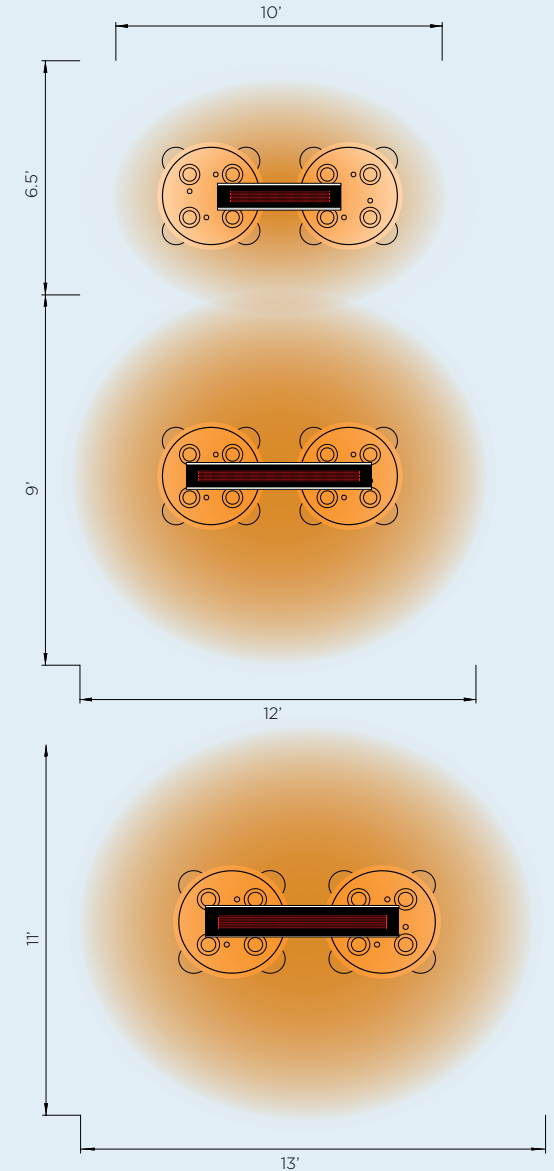



EXTEND YOUR COMFORT OUTDOORS
WITH THE SUPERIOR HEAT AND
AWARD-WINNING DESIGN OF OUR
SMART-HEAT™ OUTDOOR HEATERS.



VERSATILE MOUNTING SOLUTION
Minimal vertical clearance

HIGH PERFORMANCE CONSTRUCTION
304 stainless-steel & tinted ceramic screen

CLEAN, COMPACT AND ELEGANT DESIGN
For seamless integration



COMPATIBLE WITH SMART-WIRELESS TECHNOLOGY

ADJUSTABLE MOUNTING BRACKETS

Allows for directional heat distribution

BROMIC.COM

ASIA PACIFIC | NORTH AMERICA | EUROPE

Bromic pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.