

Features

Meets requirements for efficiency rebates

14¼ framing depth

Mobile home compatible

DELRAY

LINEAR

SPECIFICATIONS AND FEATURES

DELRAY LINEAR

DELRAY BASIC LINEAR

DRL3613
DRL4813

Single sided
Direct vent

QUICK DIMENSIONS

	DRL3613		DRL4813	
	UNIT	FRAM.	UNIT	FRAM.
F.WIDTH	45¼	43¾	57¼	55¾
B.WIDTH	41¾	43¾	53⅞	55¾
HEIGHT	26¾	33⅞	26¾	33⅞
DEPTH	12¾	14¼	12¾	14¼
VIEWING	36½ × 14⅞		48½ × 14⅞	

Standard

Concealed burner with Ice fireglass

Full feature Proflame 2 remote control

Remote controlled fans

Invisimesh screen

Black reflective glass

Halogen downlighting

Options

Propane conversion kit

Speckled stones, driftwood, firestones, firebeads or fireglass

Standard

Concealed burner with Ice fireglass

Options

Remote control

Fan kit

Invisimesh screen

Black reflective glass

Propane conversion kit

Speckled stones, driftwood, firestones, firebeads or fireglass



BTU LISTING

DRL3613NI / 16,000
DRL4813NI / 21,000
DRL3613LI / 16,000
DRL4813LI / 19,000

DRL3613NI-2 / 16,000
DRL4813NI-2 / 21,000
DRL3613LI-2 / 16,000
DRL4813LI-2 / 19,000


EFFICIENCY

DRL3613NI / 71% P.4. 1-15
DRL4813NI / 63% P.4. 1-15
DRL3613LI / 71% P.4. 1-15
DRL4813LI / 60% P.4. 1-15

DRL3613NI-2 / 71% P.4. 1-15
DRL4813NI-2 / 63% P.4. 1-15
DRL3613LI-2 / 71% P.4. 1-15
DRL4813LI-2 / 60% P.4. 1-15



DELRAY DIMENSIONS

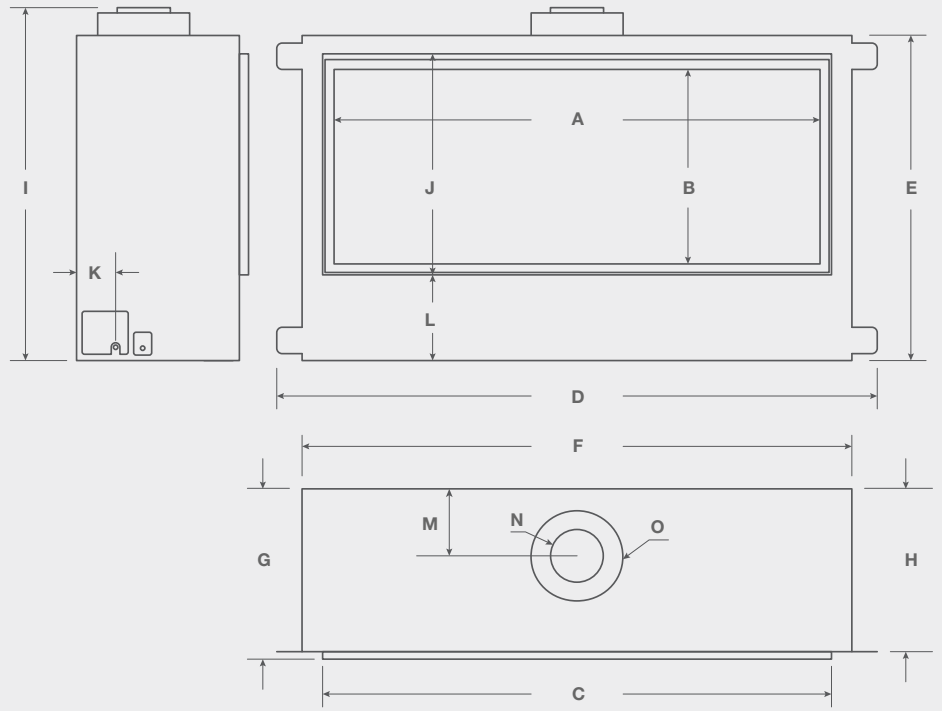

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
DRL36	36½	14 ¹ / ₁₆	38¾	45¼	24¼	41¾	12¾	12 ⁵ / ₁₆	26¾	16 ⁵ / ₈	3 ³ / ₈	6 ⁹ / ₁₆	5	4	7
DRL48	48½	14 ¹ / ₁₆	50 ⁹ / ₁₆	57¼	24½	53 ⁷ / ₁₆	12¾	12 ⁵ / ₁₆	26¾	16 ⁵ / ₈	3 ³ / ₈	6 ⁹ / ₁₆	5	4	7

MONTIGO / DELRAY / LINEAR / DRL3613NI / ICE FIREGLASS

MONTIGO / DELRAY / LINEAR / DRL3613NI-2 / ICE FIREGLASS



REMOTE[†]
RX200**

WALL REMOTE
REC1493



BLACK GLASS[†]
RBGDRL**



DOWNLIGHTING[†]



TRIM KIT
DRLT**.*

[†]Standard for full load units

OPTIONS &
FEATURES

Unit Specifications

Icon Legend	
AVAILABLE	+
DEDICATED	◊

NOT AVAILABLE	-
STANDARD	◦

	BTU Natural Gas	BTU Liquid Propane	Venting	Clearance Top - Top vent	Clearance Sides	Clearance Back	Clearance Floor	Front viewing area	Front glass type	Standard media	Invisimesh screen	Powervent	Remote control	Fans	Uplighting	Downlighting
DRL3613*I-2	16,000	16,000	4"/7"	21	1	2	0	36½ x 14 ¹¹ / ₁₆	Tempered	HW1157	◦	+	◦	◦	-	◦
DRL3613*I	16,000	16,000	4"/7"	21	1	2	0	36½ x 14 ¹¹ / ₁₆	Tempered	HW1157	+	+	+	+	-	-
DRL4813*I-2	21,000	19,000	4"/7"	21	1	2	0	48½ x 14 ¹¹ / ₁₆	Tempered	HW1157	◦	+	◦	◦	-	◦
DRL4813*I	21,000	19,000	4"/7"	21	1	2	0	48½ x 14 ¹¹ / ₁₆	Tempered	HW1157	+	+	+	+	-	-

DELRAY LINEAR FRAMING

	A	B	C	D	E	F
DRL3613	34	14¼	43¾	47½	67⅞	½
DRL4813	34	14¼	55¾	56⅛	79¼	½

Header must be on edge to meet clearance to venting

