


APPLIANCE SPECIFICATIONS



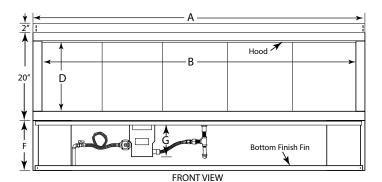




VRE4600

	36	48	60	72
Α	40"	52"	64"	76"
В	36"	48"	60"	72"
С	33-1/2"	33-1/2"	33-1/2"	33-1/2"
D	16"	16"	16"	16"
E*	16-1/4"*	16-1/4"*	16-1/4"*	16-1/4"*
F	11-1/2"	11-1/2"	11-1/2"	11-1/2"
G	8-3/4"	8-3/4"	8-3/4"	8-3/4"

^{*} Subtract 1/4" for see-through applications.

FRAMING SPECIFICATIONS

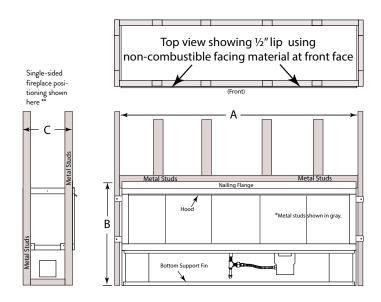

VRE4600

	36	48	60	72
Α	40-1/2"	52-1/2"	64-1/2"	76-1/2"
В	33-3/4"	33-3/4"	33-3/4"	33-3/4"
C ¹ SINGLE SIDED DEPTH	16-1/4"	16-1/4"	16-1/4"	16-1/4"
C ² SEE-THROUGH DEPTH	15"	15"	15"	15"

FIREPLACE BTU OPERATING RANGE

MODEL	FUEL	BTU/HR	
ODLVF36	NG	31,000-18,500	
ODLVF36	LP	30,000-19,500	
ODLVF48	NG	43,500-24,500	
ODLVF48	LP	42,500-29,000	
ODLVF60	NG	50,000-36,000	
ODLVF60	LP	50,000-36,000	
ODLVF72	NG	65,000-42,000	
ODLVF72	LP	60,000-45,000	

On the Cover: ODLVF72 shown with Diamond Crystal large crushed glass media.

IMPORTANT NOTES:

As with any fireplace, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer.

Local conditions, such as elevation and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, ceiling height, accessories chosen and appliance location.

Diagrams, illustrations and photographs are not to scale — consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.

